Reducing range anxiety by reducing harness weight using power modules

YK Choi – Sr. FAE Automotive APAC

©2023 Vicor

The challenge: Wire harness weight and inefficiency underestimated

- The wire harness is one of the three heaviest subsystems in today's vehicles
- 2,000 copper wires totaling 1 mile in length
- 150lbs in highly contented vehicles

> "We didn't know that our wiring harness for Mach-E was 1.6 kilometer longer than it needed to be. We didn't know it's 70 pounds heavier and that that's [cost an extra] $300 a battery"
>
> — *Ford CEO Jim Farley*

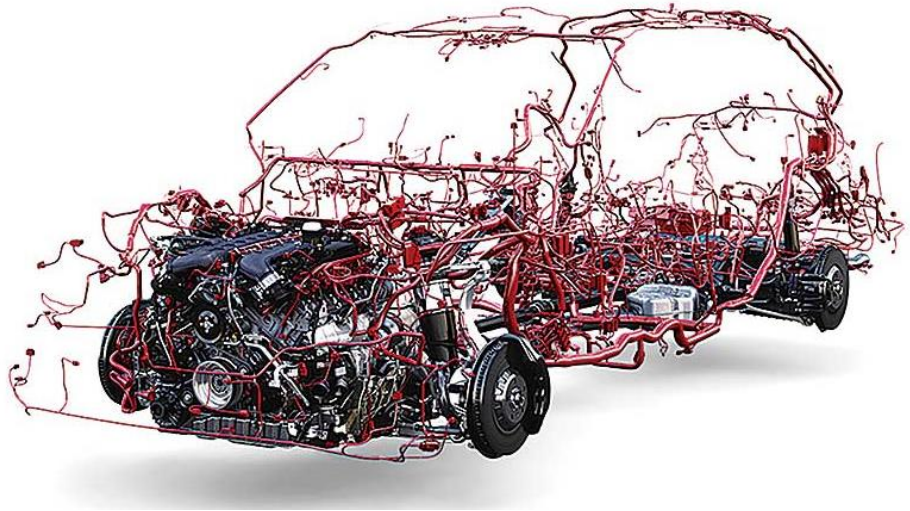

©2023 Vicor

BMW 7 series G12 – complexity of wiring routing

- 12V power harness length: 5m
- 12V power net : 27mm^2 or 4AWG
- Several 1kW loads in engine compartment
- 12V @ 80A



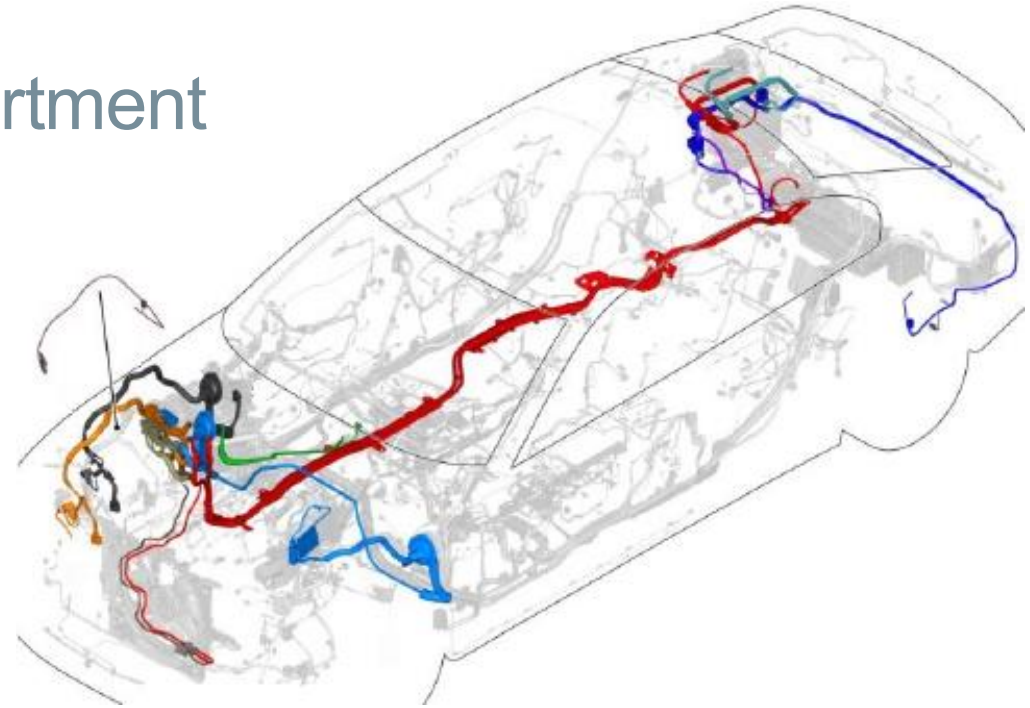

©2023 Vicor

Power delivery on typical 12V architecture

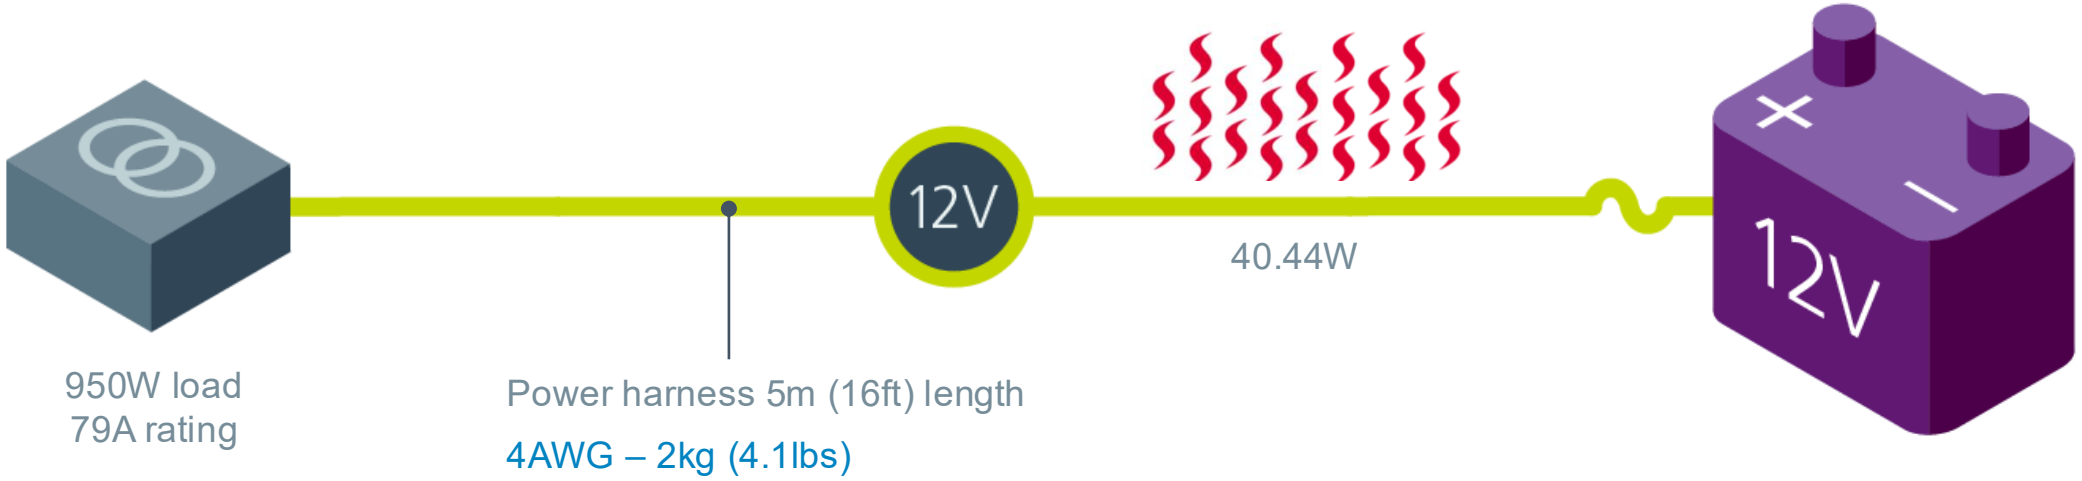

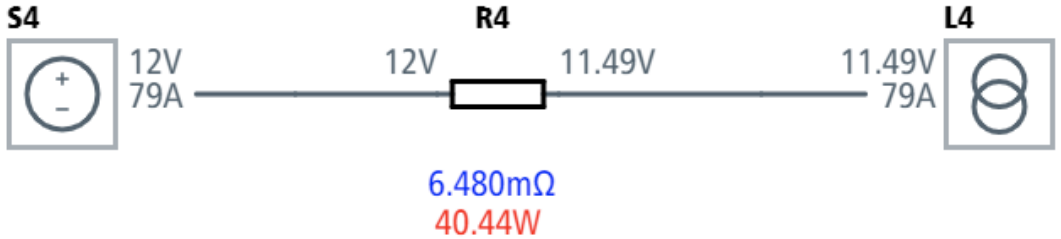

Benefits:

- Known power architecture
- Easy implementation

Drawbacks:

- Weight
- Routing complexity, high current connection and fuse
- Wire commodity cost uncertain
- Wire harness system power loss

©2023 Vicor

Power delivery with 48V architecture: 85% weight reduction!

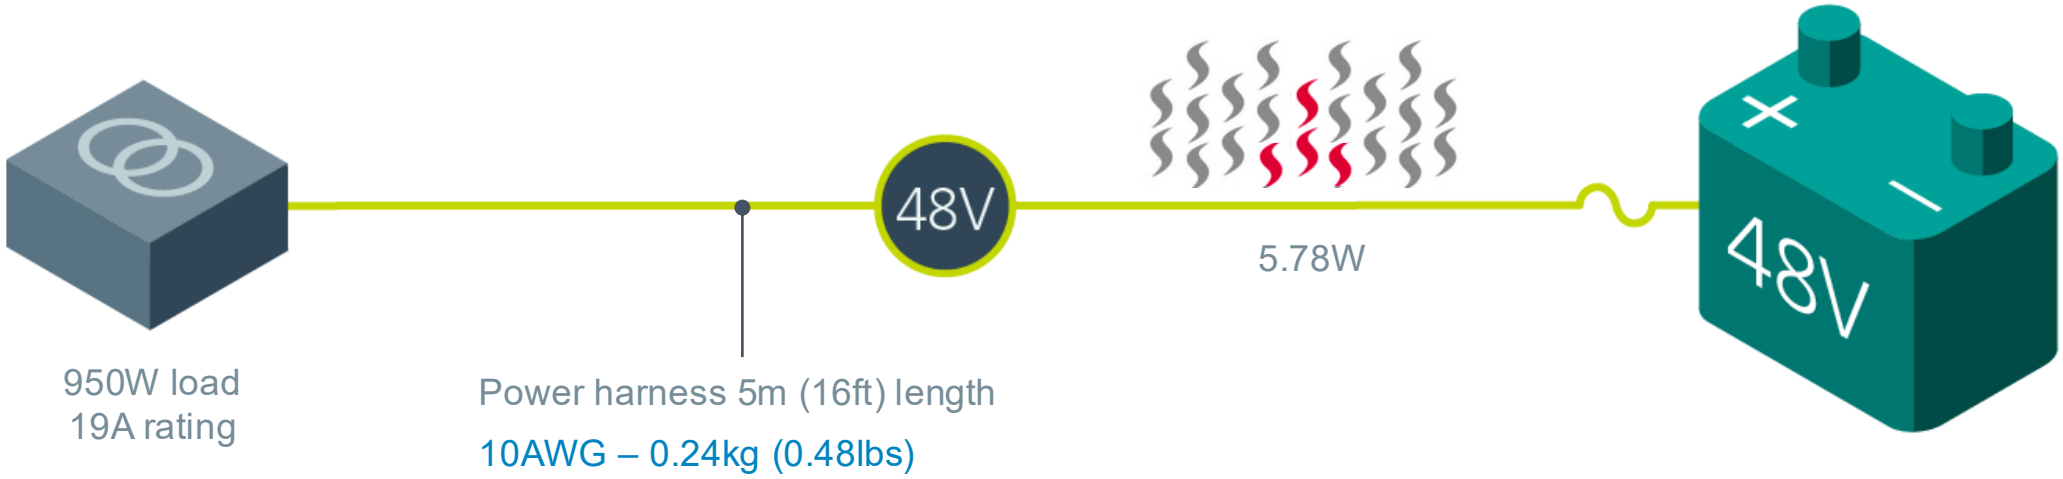

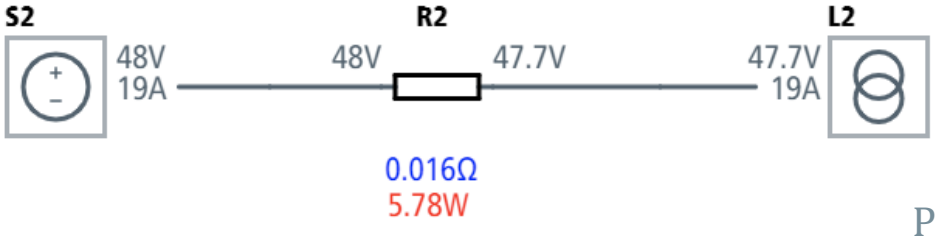

$$P = RI^2$$

Power losses in wiring harnesses are proportional to the square of currents => 1/16

Benefits:

- 85% weight wire harness weight over 12V system
- Easier wire harness routing

Drawbacks:

- New vehicle power delivery architecture
- Li-Ion Battery complexity and cost
- Need DC-DC converter 48V to 12V for the 12V loads

©2023 Vicor

48V power wiring harness system design advantage

Power dissipation and weight:

Example: all wires ≥30A @ 12V show a potential of reducing:

- Power dissipation by 5W to 10W
- Weight by approximately 2,5 kg

Assumptions:

- 20 of 130 power supply lines ≥30A
- with cross sections from 2,5mm^2 to 25mm^2

Wiring materials – copper vs. aluminum

	600W @ 12V		600W @ 48V	
Load current	50A	50A	12,5A	12,5A
Material of wires	copper	aluminum	copper	aluminum
Cross section	10mm^2	17mm^2	1,5mm^2	2,5mm^2
Weight/length	108g/m	74/gm	17g/m	11g/m
Power loss/length	4,5W/m	3,8W/m	1,8W/m	1,6W/m

- The transition from 12V to 48V allows for the continuing use of copper wiring
- Further optimization: aluminum wiring with equivalent weight reduce power dissipation by 50%

©2023 Vicor

Doing things differently with the right technology?

The right technology is needed to enable an increase of the overall system efficiency with optimized Power Delivery Network while beneficiating wire harness weight reduction.

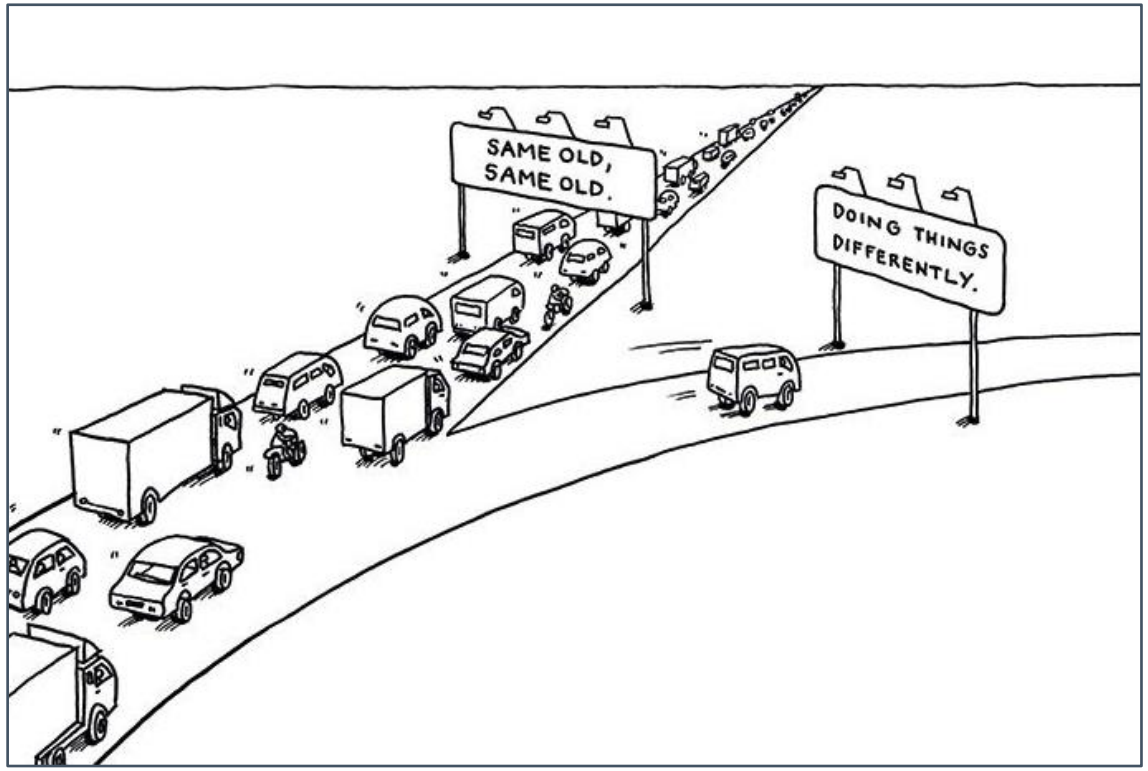

©2023 Vicor

Enabling technology to bridge the voltages

SAC (Sine Amplitude Converter) topology and innovative controller designs and systems

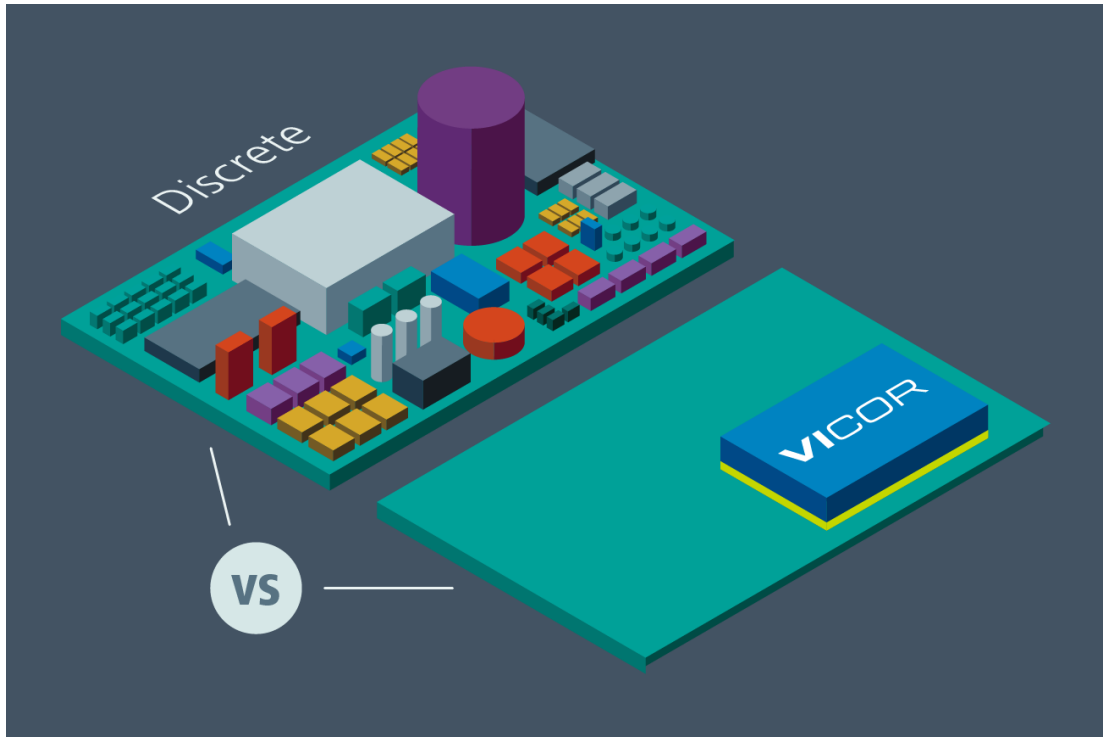

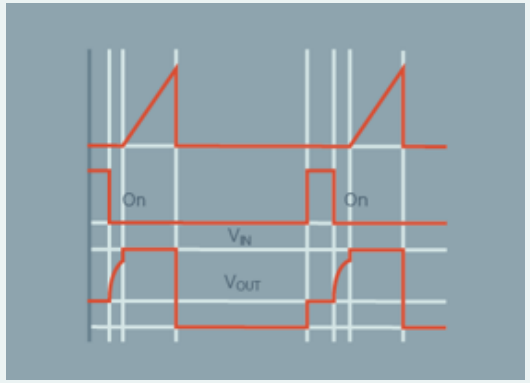

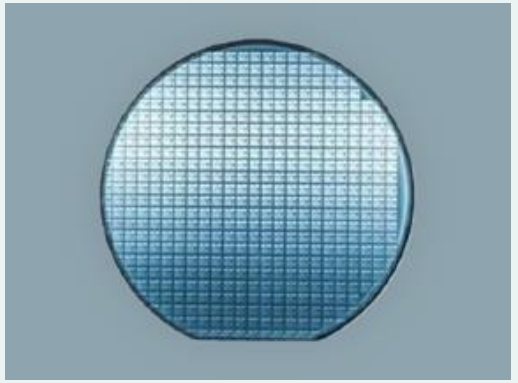

©2023 Vicor

Sine amplitude converter – what is it?

- Sine Amplitude Converter topology:
  - Zero-voltage switching
  - Zero-current switching
- Fixed-ratio conversion:
  - Divide/multiply the voltage/current
- Extremely fast transient current capability
- Ideal transformer behavior
- No inductor usage
- Not dependent on internal energy storage

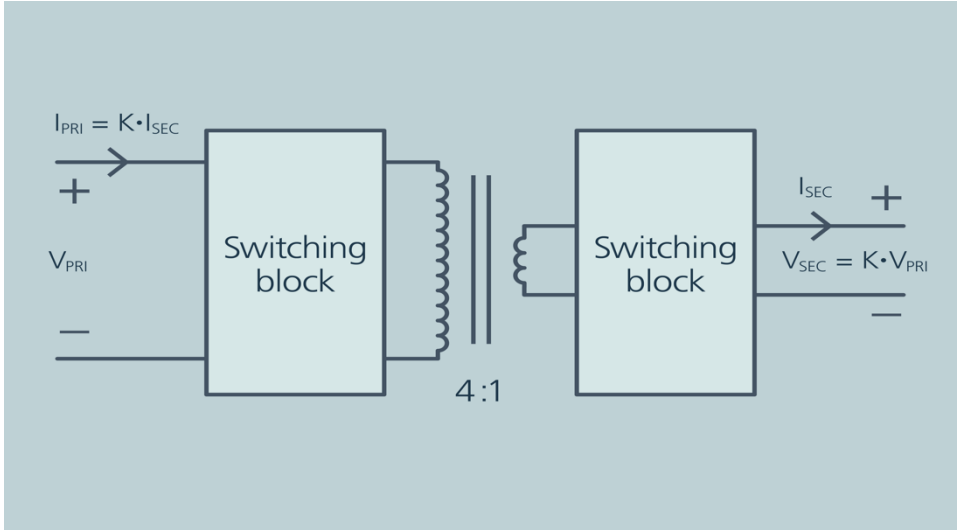

K factor	1/16	1/4	1/1	4/1
V_{PRI}	800	48	48	12
V_{SEC}	48	12	48	48
I_{PRI}	1	1	1	4
I_{SEC}	16	4	1	1

©2023 Vicor

Fixed ratio converter – fast transient response

- High frequency switching
- Smaller magnetic components
- Smaller path lengths for turns
- Package has very low parasitic inductance on input/output connections
- Response is flat as a function of R_{OUT} from DC to over a MHz

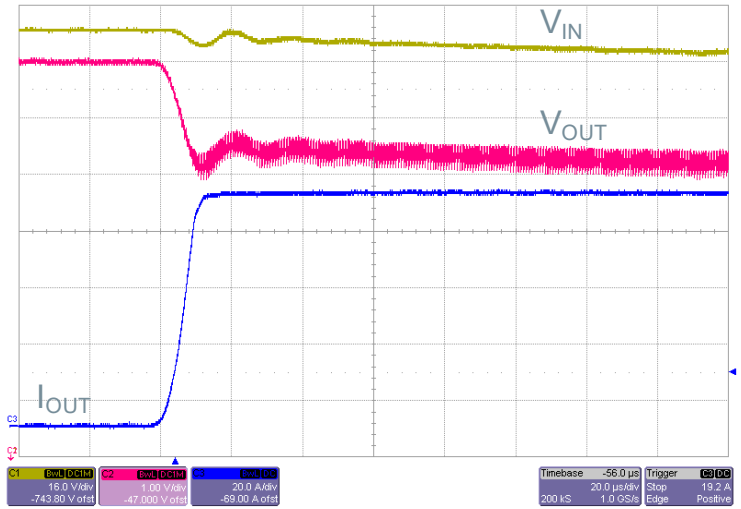

di/dt up to 10MA/s

Load step from 0A – 80A
Timebase – 20µs/div

Low impedance path

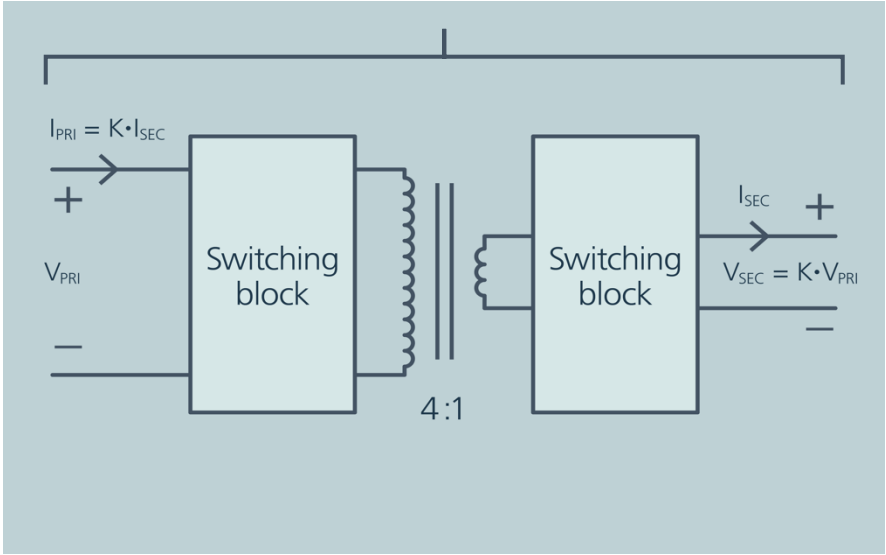

©2023 Vicor

Fast transient response, low impedance and bidirectional operation enables – Battery Virtualization

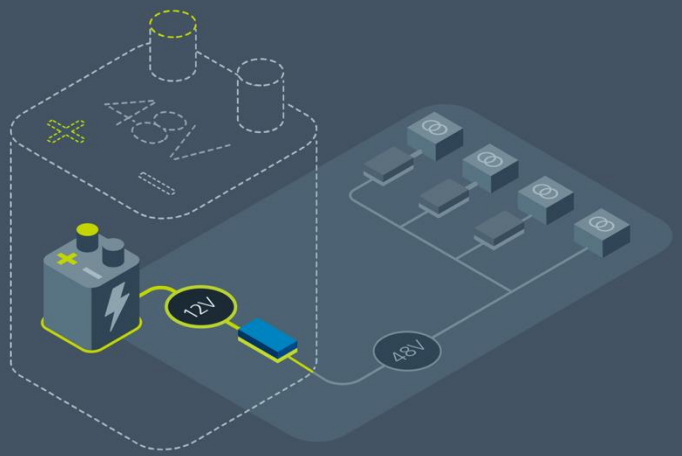

Virtualize a 48V battery to enable 48V load compatibility on a 12V vehicle architecture

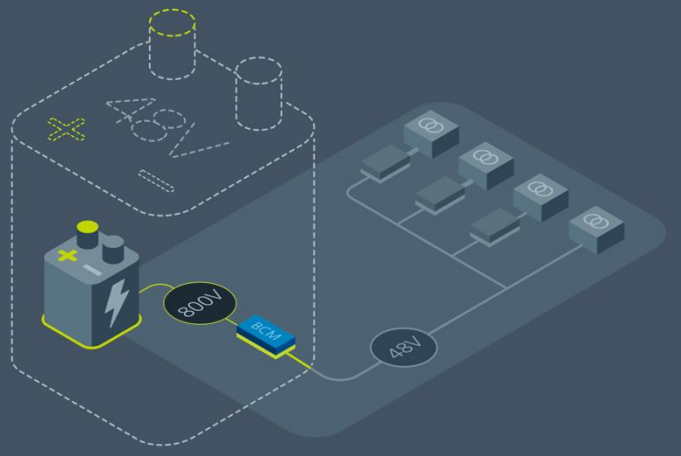

Virtualize a 48V Battery to enable 48V loads in a BEV with isolated SAC

Scalability of the vehicle Power Delivery Network across the range ICE/BEV

©2023 Vicor

Product solution: NBM2317 and NBM3523



- Input/output range: 38V - 60V_{DC} / 9.5V - 15V_{DC}
- Output Current (step down): 160A – 2kW
- Fixed ratio (k = 1/4)
- Peak efficiency: 97.9%
- Full power bidirectional



- Input/output range: 38V - 60V_{DC} / 9.5V – 15V_{DC}
- Output current (step down): 80A – 1kW
- Fixed ratio (k = 1/4)
- Peak efficiency: 98.3%
- Full power bidirectional

©2023 Vicor

SAC technology with 12V architecture: 85% weight reduction

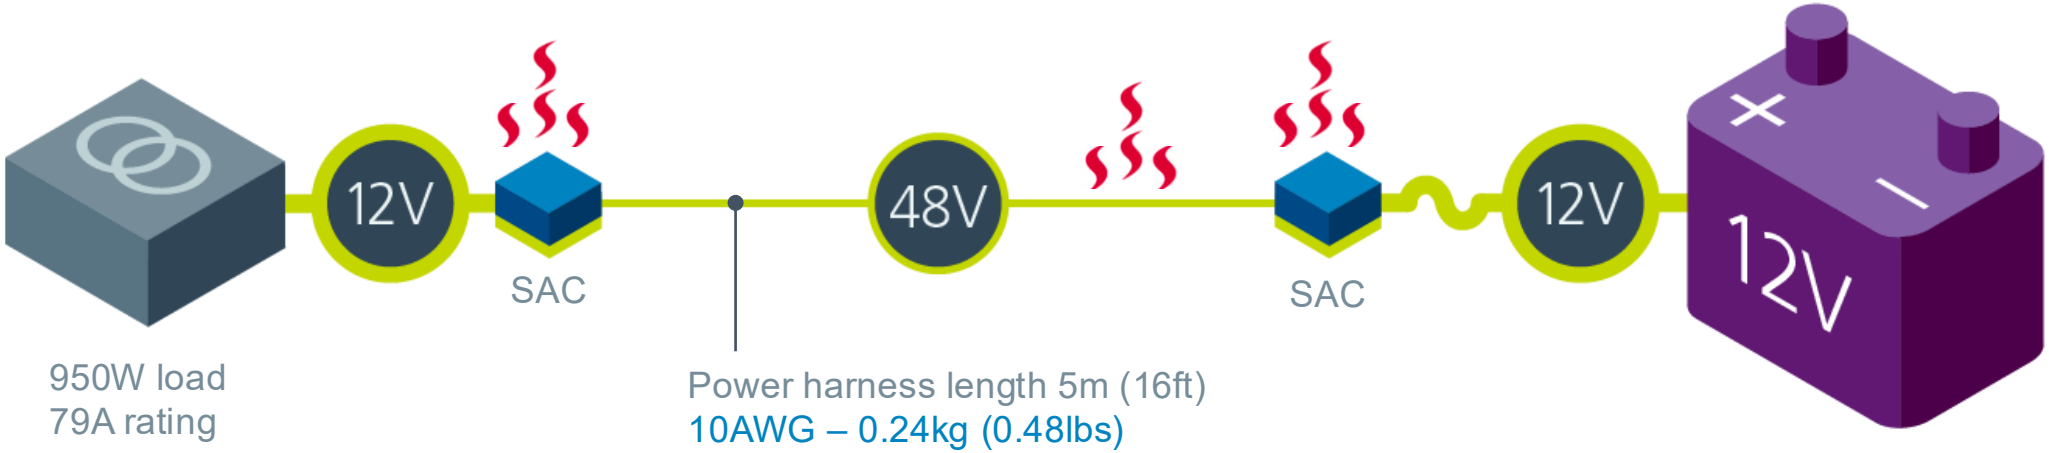

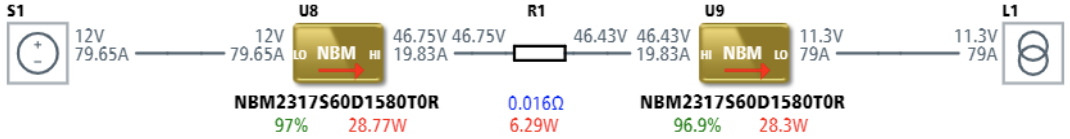

Benefits:

- Minimum architecture change
- Wire harness routing
- 85% wire weight reduction compared to 12V

Drawbacks:

- Not taking full advantage of higher bus voltage at the load
- Additional hardware
- Low efficiency

©2023 Vicor

SAC enabling 48V battery virtualization:
85% weight reduction and efficiency



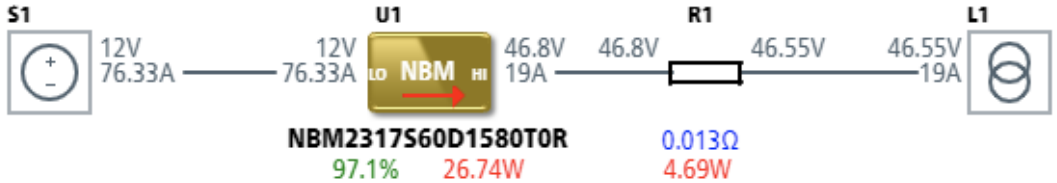

Benefits:

- PDN optimization
- Overall system weight reduction
- Scalability
- System power loss minimized

Drawbacks:

- 48V load
- Cost

©2023 Vicor

Enabling up to 85% wire harness weight reduction on a BEV architecture

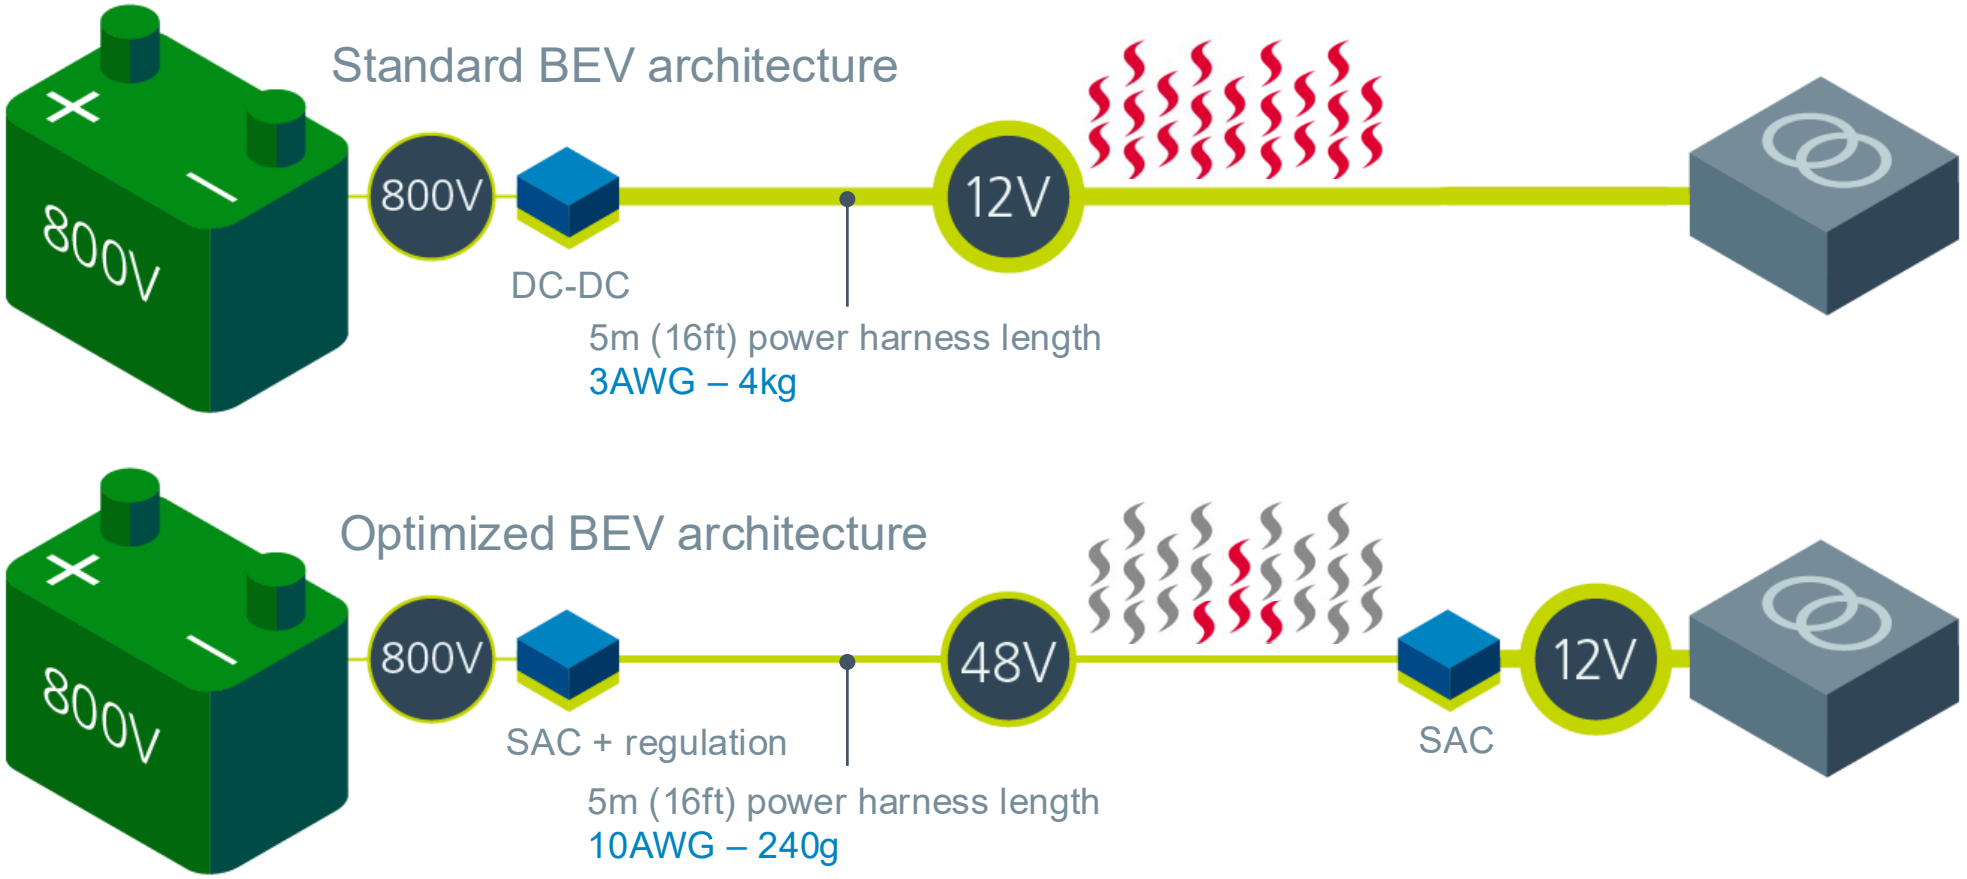

©2023 Vicor

Enabling weight reduction on a BEV architecture… further

Consolidation of power supply systems in a distributed 48V:

- 12V wiring harness reduced to a minimum
- Leverage 48V and HV for high power loads and power distribution
- Fewer LV battery storage (12V/48V)

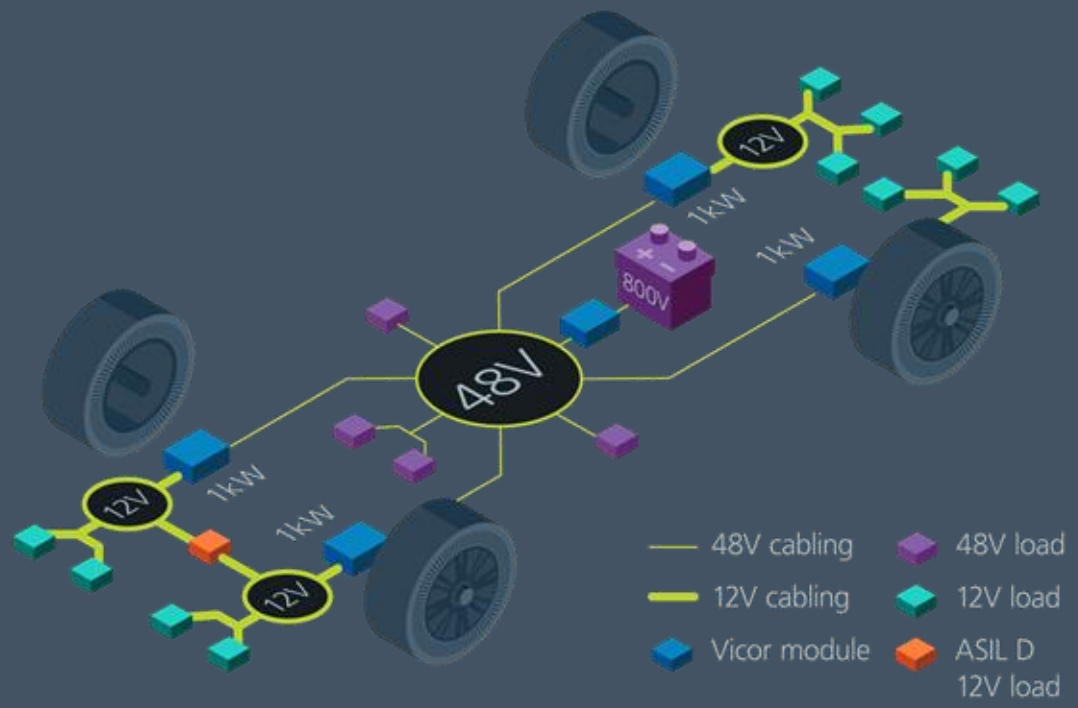

©2023 Vicor

Additional application possibilities

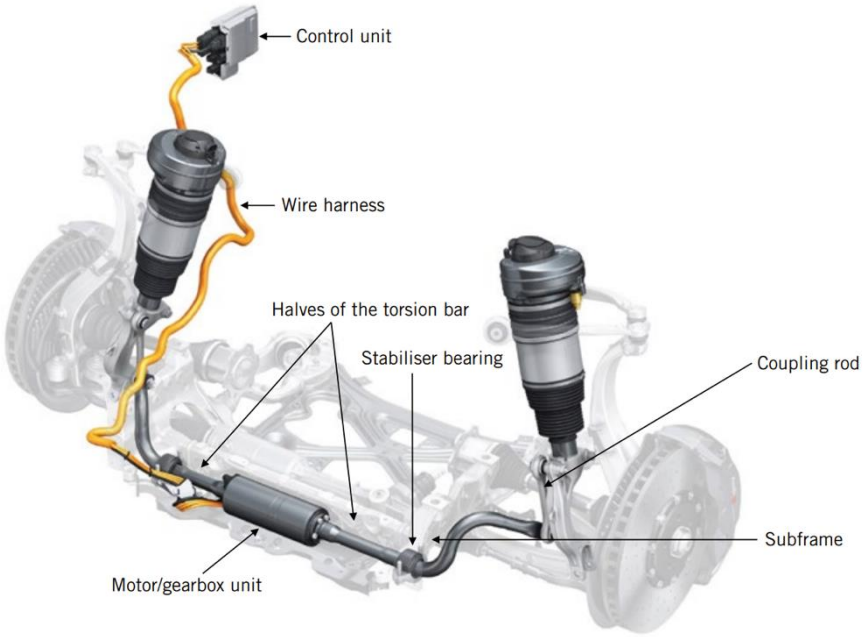

Enable 48V load compatibility on a 12V vehicle power architecture

(ICE for instance with 48V active suspension)



Commercial vehicle applications

(15 – 20 meters wire harness)

VICOR

©2021 Vicor

Conclusion – what can Vicor technology enable

- Increase the bus voltage to 48V enables up to 85% weight reduction on the power distribution wiring harness.
- Better thermal management and wiring harness routing.
- Reduction of system complexity and overall cost.
- Increase electrical efficiency from source to load.

Electrical efficiency of E/E systems to reduce CO^2 emissions or to increase electric range

100W electrical power ~ approximately 1g/km CO_2 (ICE) or 10km range (BEV)

©2023 Vicor

YK (Yeon Kyu) Choi

ychoi@vicorpower.com

YK is the Automotive Sr. Field Application Engineer, helping power engineers architect new automotive power delivery systems. He has a MSc in Power Electronics from Konkuk University.

Scan and download the presentation



©2023 Vicor

Thank you

References:

BMW AG – Ottmar Sirch: *Future vehicle Power supply with 48V Nov 2019*

Scan and download the presentation

©2023 Vicor